



MOMENTIVE
performance materials

CoatOSil^{*} 2287 Silane

crosslinker and adhesion promoter for waterborne coatings

Product Description

CoatOSil 2287 silane may provide shelf stable non-yellowing crosslinking performance to enhance the physical properties of waterborne dispersion polymers such as polyurethane and acrylic latexes. When CoatOSil 2287 silane is incorporated as a crosslinker or adhesion promoter, it may provide improved water resistance and wet adhesion, with good shelf stability.

Key Features and Typical Benefits

- Enhanced water and organic solvent resistance of coatings
- Improved wet and dry adhesion, without yellowing
- Performance consistency with aging

Typical Physical Properties

Property	CoatOSil 2287
Specific Gravity at 25°C	0.979
Viscosity at 25°C, cSt	3
Flash Point, Pensky-Martens closed cup ASTM D93, °C (°F)	104 (220)

Momentive Performance Materials provides versatile materials as the starting point for our creative approach to ideas that help enable new developments across hundreds of industrial and consumer applications. We are helping customers

solve product, process, and performance problems; our silanes, fluids, elastomers, sealants, resins, adhesives, urethane additives, and other specialty products are delivering innovation in everything from car engines to biomedical devices.

From helping to develop safer tires and keeping electronics cooler, to improving the feel of lipstick and ensuring the reliability of adhesives, our technologies and enabling solutions are at the frontline of innovation.

Potential Applications

CoatOSil 2287 silane is an excellent candidate to consider for formulations employing carboxylated latexes (acrylic, SBR, polyurethane, etc.) exhibiting a pH between 6 and 8.5.

CoatOSil 2287 silane may be employed as an adhesion promoter or crosslinker. It may be suitable for use as a water stable single component crosslinker in applications such as:

- Wood furniture and flooring finishes
- Metal coatings

In such applications, CoatOSil 2287 silane may provide a means of replacing a 2 part waterborne coating with a single component system. The potential benefits of a silane crosslinked water stable single component system include reduced scrap, improved process efficiency and reduced crosslinker toxicity.


Table 1: Acrylic Latex Wood Coating Test Formulation

Material	Control phr	Silane Modified phr
First Step		
Latex (45% solids, acid number = 48, MFFT < 5°C)	69.5	69.5
Water	9.5	8.3
CoatOSil 2287 Epoxysilane	0.0	1.2 (induction time of 2 days)
Second Step		
Matting agent	0.9	0.9
Water	4	4
CoatOSil 1211 Surfactant	0.2	
Coalescing agent	9	9
Wax dispersion	4.3	4.3
Wax dispersion	2.5	2.5
Ammonium Hydroxide (25%)	0.1	0.1
Total	100	100

Note: Ratio of epoxysilane to acid functionality of resin = 0.08% silane per mg KOH acid number (3.8 phr)

Test data. Actual values may vary.

Chemical Structure

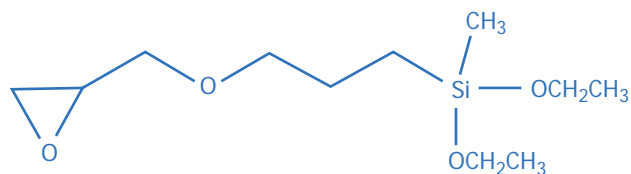

Chemical Name
3-Glycidoxypropylmethyl-diethoxysilane

CAS # 2897-60-1


Potential Applications (continued)

Reactivity Characteristics

CoatOSil 2287 silane reacts with carboxyl groups in anionic polymers to produce a silylated polymer. An acid number of 15 or greater is necessary to have enough sites for effective silylation and crosslinking during coalescence and cure of the coating.

It is recommended that the silane be added to the latex and then allowed to stand for one to three days before the mixture is applied to a substrate. This induction time is polymer dependant and must be checked prior to final tests or application. As the modified latex typically stays shelf stable, it is usually not a problem to keep material for induction prior to industrial applications. Figure 1 illustrates the pH change (relative to the latex control) that occurs as the -COOH group is reacted with the glycidoxo group.

Figure 1: Impact of Epoxysilane on pH of Acrylic Latex

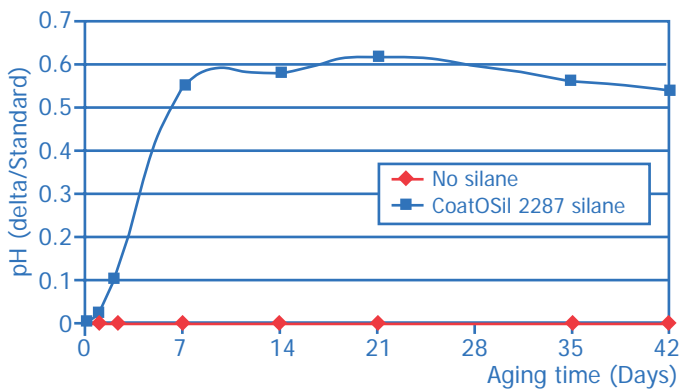


Note: Test data. Actual results may vary.

Potential Applications (continued)

Shelf Stability Performance

CoatOSil 2287 silane may help deliver enhanced crosslinking and adhesion performance without the rapid loss of shelf stability observed with methoxysilanes. Figure 2 illustrates the effect of aging on viscosity of the acrylic latex formulation described in Table 1.

Figure 2: Waterborne Acrylic Latex Shelf Stability - Change in Viscosity at Ambient Conditions

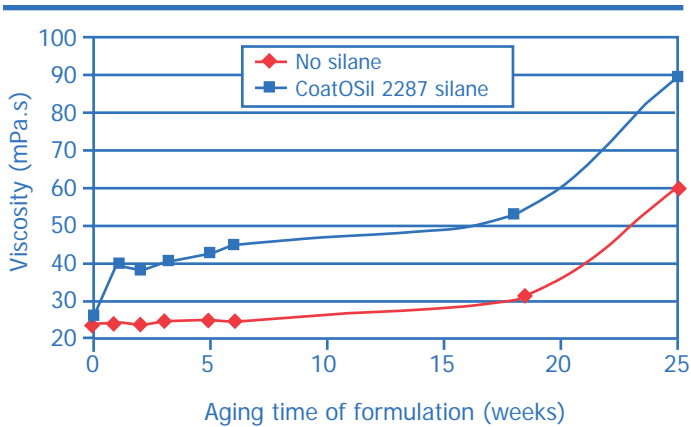


Note: Test data. Actual results may vary.

Crosslinking Performance

CoatOSil 2287 silane delivers high gel content by crosslinking polymer chains. Figure 3 illustrates the measured gel content of the acrylic latex formulation described in Table 1. Figure 4 shows the potential improvement in solvent resistance for the same formulation with and without CoatOSil 2287 and Figure 5 illustrates the potential improvement in water resistance. The different figures illustrate the effects of freshly modified latexes after one week or of aged latexes after 6 months storage

Figure 3: Gel Content of Acrylic Latex Coating Cured with CoatOSil 2287 Silane

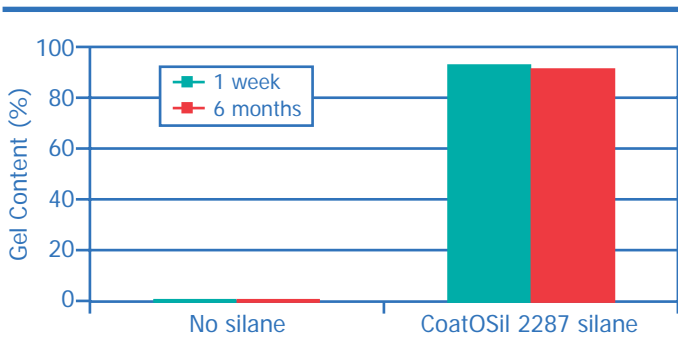

Note: Test data. Actual results may vary.

Potential Applications (continued)

Figure 4: Solvent Resistance of Acrylic Latex Coating Cured with CoatOSil 2287 Silane


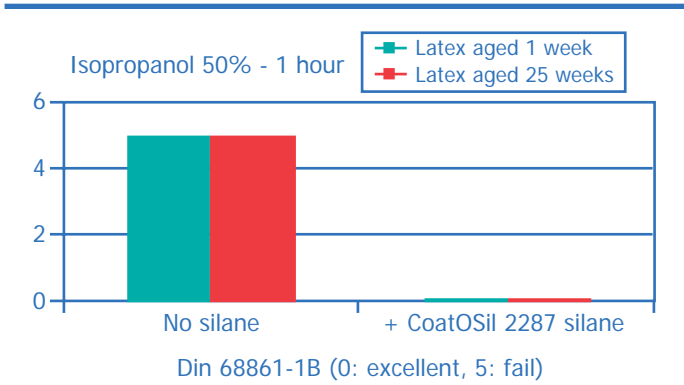


Figure 5: Water Resistance of Acrylic Latex Coating Cured with CoatOSil 2287 Silane

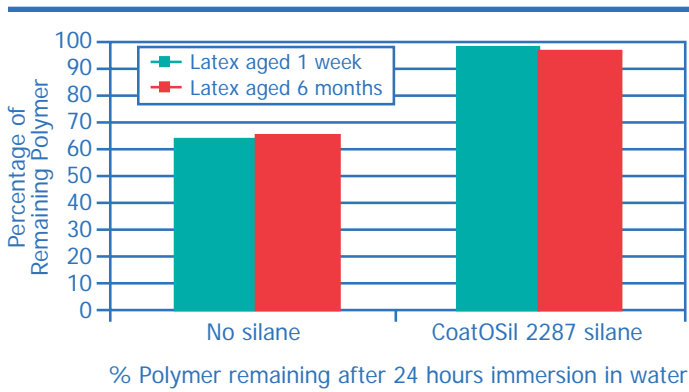

Note: Test data. Actual results may vary.

Potential Applications (continued)

Recommended Loading Levels


Initial loading levels of 2.0 phr on resin solids are recommended for the development of improved performance through crosslinking. The formulation demonstrated in this bulletin had 0.08 weight % silane added for each unit of acid number. Higher levels may impact shelf life.

Staining Resistance of Wood Coating

Figure 6 shows the staining resistance of formulation given in Table 1 as applied on oak ply wood panels. Application procedure involves deposit of 130g/sqm of wet coating using a spray gun.

Staining tests are made according to DIN 68861-1B. Figure 6 reports tests for latex without silane and for Silylated Acrylic Latex (SAL) using CoatOSil 2287 silane aged 1 week or six months.

Figure 6

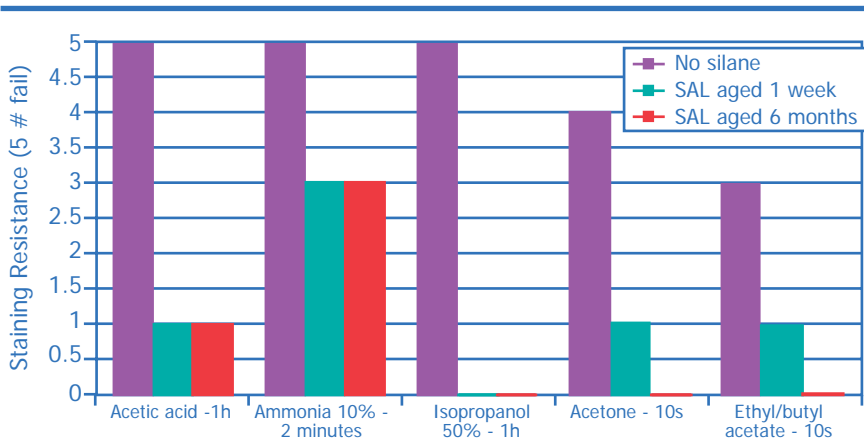

Note: Test data. Actual results may vary.

Patent Status

Nothing contained herein shall be construed to imply the nonexistence of any relevant patents or to constitute the permission, inducement or recommendation to practice any invention covered by any patent, without authority from the owner of the patent.

Product Safety, Handling and Storage

Customers considering the use of this product should review the latest Material Safety Data Sheet and label for product safety information, handling instructions, personal protective equipment if necessary, and any special storage conditions required. Material Safety Data Sheets are available at www.momentive.com or, upon request, from any Momentive Performance Materials representative. Use of other materials in conjunction with Momentive Performance Materials products (for example, primers) may require additional precautions. Please review and follow the safety information provided by the manufacturer of such other materials.

Limitations

Customers must evaluate Momentive Performance Materials products and make their own determination as to fitness of use in their particular applications.

Emergency Service

Momentive Performance Materials maintains an around-the-clock emergency service for its products. The American Chemistry Council (CHEMTREC), Transport Canada (CANUTEC), and the Chemical Emergency Agency Service also maintain an around-the-clock emergency service for all chemical products:

Location	Momentive Performance Materials Products	All Chemical Products
Mainland U.S., Puerto Rico	518.233.2500	CHEMTREC: 800.424.9300
Alaska, Hawaii	518.233.2500	CHEMTREC: 800.424.9300
Canada	518.233.2500	CANUTEC: 613.996.6666 (collect) or CHEMTREC: 800.424.9300
Europe, Middle East, Africa	+32.(0)14.58.45.45 (Belgium)	CHEMTREC: +1-703.527.3887 (collect)
Latin America, Asia/Pacific, all other locations worldwide	+518.233.2500	CHEMTREC: +1-703.527.3887 (collect)
At sea	Radio U.S. Coast Guard, which can directly contact Momentive Performance Materials at 518.233.2500 or CHEMTREC at 800.424.9300.	

DO NOT WAIT. Phone if in doubt. You will be referred to a specialist for advice.

Principal Locations

Regional Information	Phone	Fax
North America		
World Headquarters 187 Danbury Road Wilton, CT 06897, USA	800.295.2392	607.754.7517
Latin America		
Rodovia Eng. Constâncio Cintra, Km 78,5 Itatiba, SP – 13255-700 Brazil	+ 55.11.4534.9650	+ 55.11.4534.9660
Europe, Middle East, Africa and India		
Leverkusen Germany	00.800.4321.1000 + 31.164.293.276	+ 31.164.241750
Pacific		
Akasaka Park Building 5-2-20 Akasaka Minato-ku, Tokyo 107-6112 Japan	+ 81.3.5544.3100	+ 81.3.5544.3101
Customer Service Centers		
North America		
Charleston, WV 25314, USA E-mail: cs-na.silicones@momentive.com	Specialty Fluids 800.523.5862	304.746.1654
	UA, Silanes, Resins, and Specialties 800.334.4674	304.746.1623
	RTV Products-Elastomers 800.332.3390	304.746.1623
	Sealants and Adhesives and Construction 877.943.7325	304.746.1654
Latin America		
Argentina and Chile	+ 54.11.4862.9544	+ 54.11.4862.9544
Brazil	+ 55.11.4534.9650	+ 55.11.4534.9660
Mexico and Central America	+ 52.55.5899.5135	+ 52.55.5899.5138
Venezuela, Ecuador, Peru, Colombia, and Caribbean	+ 58.212.285.2149	+ 58.212.285.2149
E-mail: cs-la.silicones@momentive.com		
Europe, Middle East, Africa and India		
E-mail: cs-eur.silicones@momentive.com	00.800.4321.1000 + 31.164.293.276	+ 31.164.241750
Pacific		
E-mail: cs-ap.silicones@momentive.com		
Japan	+ 81.276.20.6182	
China	+ 86.21.5050.4666 (ext. 1523)	
Korea	+ 82.2.6201.4600	
Singapore	+ 65.6220.7022	
Worldwide Hotline	800.295.2392	+ 607.786.8131
Worldwide Web		+ 607.786.8309
		www.momentive.com

THE MATERIALS, PRODUCTS AND SERVICES OF MOMENTIVE PERFORMANCE MATERIALS INC., MOMENTIVE PERFORMANCE MATERIALS USA INC., MOMENTIVE PERFORMANCE MATERIALS ASIA PACIFIC PTE. LTD., MOMENTIVE PERFORMANCE MATERIALS WORLDWIDE INC., MOMENTIVE PERFORMANCE MATERIALS GmbH & Co. KG, MOMENTIVE PERFORMANCE MATERIALS SUISSE Sarl, THEIR SUBSIDIARIES AND AFFILIATES DOING BUSINESS IN LOCAL JURISDICTIONS (collectively "SUPPLIERS"), ARE SOLD BY THE RESPECTIVE LEGAL ENTITY OF THE SUPPLIER SUBJECT TO SUPPLIERS' STANDARD CONDITIONS OF SALE, WHICH ARE INCLUDED IN THE APPLICABLE DISTRIBUTOR OR OTHER SALES AGREEMENT, PRINTED ON THE BACK OF ORDER ACKNOWLEDGMENTS AND INVOICES, AND AVAILABLE UPON REQUEST. ALTHOUGH ANY INFORMATION, RECOMMENDATIONS, OR ADVICE CONTAINED HEREIN IS GIVEN IN GOOD FAITH, SUPPLIERS MAKE NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (i) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING SUPPLIERS' PRODUCTS, MATERIALS, SERVICES, RECOMMENDATIONS OR ADVICE. AFOREMENTIONED EXCLUSIONS OR LIMITATION OF LIABILITY ARE NOT APPLICABLE TO THE EXTENT THAT THE END-USE CONDITIONS AND/OR INCORPORATION CONDITIONS CORRESPOND TO THE RECOMMENDED CONDITIONS OF USE AND/OR OF INCORPORATION AS DESCRIBED BY SUPPLIER IN ITS PRODUCT DATA SHEET AND/OR PRODUCT SPECIFICATIONS. EXCEPT AS PROVIDED IN SUPPLIERS' STANDARD CONDITIONS OF SALE, SUPPLIERS AND THEIR REPRESENTATIVES SHALL IN NO EVENT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS OR SERVICES DESCRIBED HEREIN.

Each user bears full responsibility for making its own determination as to the suitability of Suppliers' materials, services, recommendations, or advice for its own particular use. Each user must identify and perform all tests and analyses necessary to assure that its finished parts incorporating Suppliers' products, materials, or services will be safe and suitable for use under end-use conditions. Nothing in this or any other document, nor any oral recommendation or advice, shall be deemed to alter, vary, supersede, or waive any provision of Suppliers' Standard Conditions of Sale or this Disclaimer, unless any such modification is specifically agreed to in a writing signed by Suppliers. No statement contained herein concerning a possible or suggested use of any material, product, service or design is intended, or should be construed, to grant any license under any patent or other intellectual property right of Suppliers or any of its subsidiaries or affiliates covering such use or design, or as a recommendation for the use of such material, product, service or design in the infringement of any patent or other intellectual property right.