



MOMENTIVE
performance materials

Momentive Performance Materials' New e-free* 189 Silane

Product Description

The latest advancement in silanes for mineral coupling in industrial rubber and other applications is e-free 189 silane. This mercapto-functional silane is essentially ethanol-free. It offers excellent all-around performance with significant improvements in processing characteristics (i.e. reduced viscosity, faster cure with adequate scorch safety). Improved filler dispersion with maximum silica/polymer coupling is evident by the outstanding reinforcement index. Therefore physical properties are further enhanced while maximizing abrasion resistance gains. e-free 189 silane may be used to replace traditional mercapto silanes to achieve increased end-product performance or may be used at reduced levels to maintain properties and lower overall compound cost. e-free 189 silane should virtually eliminate⁽¹⁾ the ethanol that is released during processing and use of mineral-reinforced rubber articles associated with traditional mercapto silanes like Silquest* A-189 silane and Silquest A-1891 silane.

Features and Benefits of e-free 189 silane

e-free 189 silane is an excellent candidate to consider for improved dynamic and physical properties with reduced manufacturing costs, through improved processing and virtual elimination of ethanol emissions.

Key Features and Typical Benefits

- Ethanol (VOC) emissions essentially eliminated during mixing and use
- Easier mixing, faster processing and shorter curing cycles resulting in higher throughput
- High temperature mixing without viscosity increase or scorch safety reduction
- Long shelf life for uncured compounds, yielding less scrap due to over-aged green compounds
- Improved modulus, tensile strength and abrasion resistance
- Improved balance in abrasion and cushioning effects in shoe sole compounds
- Excellent dispersion and low reagglomeration

⁽¹⁾ Contains less than 1% by weight, total releasable ethanol.

Momentive Performance Materials provides versatile materials as the starting point for our creative approach to ideas that help enable new developments across hundreds of industrial and consumer applications. We are helping customers

solve product, process, and performance problems; our silanes, fluids, elastomers, sealants, resins, adhesives, urethane additives, and other specialty products are delivering innovation in everything from car engines to biomedical devices.

From helping to develop safer tires and keeping electronics cooler, to improving the feel of lipstick and ensuring the reliability of adhesives, our technologies and enabling solutions are at the frontline of innovation.

Momentive Performance Materials' New e-free* 189 Silane

Typical Physical Properties⁽²⁾

Physical Form	Liquid
Color	Clear, colorless
Specific Gravity at 25°C	1.078
Flash Point, Pensky-Martens Closed Cup, ASTM D93 (estimated) °C (°F)	>93 (200)

(2) Values shown only for information and are not intended for specification preparation.

How to Use

Following are typical suggested loading levels of e-free 189 silane:

- Shoe sole compounds with silica (1.5-2.5 phf)
- Wire and Cable and/or Clay compounds (0.25-1.0 phf)

The optimal loadings of e-free 189 silane and the processing conditions including mixing temperature and time may vary, depending on formulations used. The user should optimize the loadings and mix conditions before end use.

Processing and Performance of e-free 189 silane

The formulation in Table 1 was used to compare e-free 189 silane with traditional mercapto silanes in a simplified model shoe-sole compound. The compounds were mixed at 160°C in two non-productive mix steps.

Table 1: Simplified Formulation for Shoe Soles

Ingredient	PHR
Butadiene Rubber	60
Natural Rubber	20
Nitrile Rubber	20
Silica	42
Wax	3
Stearic Acid	0.5
Zinc Oxide	4
Silane	1.5
Processing Aid	3
Tackifier	2
Antioxidant	1
Vulcanizing Agents	
Sulfur	2
MBT	0.2
MBTS	1
TMTM	0.12

Note: Test data. Actual results may vary.

Momentive Performance Materials' New e-free* 189 Silane

Comparison of Performance Characteristics: e-free 189, Silquest* A-1891 silane

Compound performance and processing characteristics with e-free 189 silane, Silquest A-1891 silane (Mercapto triethoxy silane), and with no silane are compared in Table 2. These data demonstrate a reduction of compound viscosity with improved silica dispersion for smoother extrusion and faster mold flow with e-free 189 silane. Physical properties are enhanced with more effective coupling, higher modulus and tensile and with maximum abrasion resistance. Shorter curing cycles allow for a faster cure rate index (t90-ts2).

Table 2


Ingredient (phr)	e-free 189 silane	Silquest A-1891 silane	No silane
e-free 189 silane	1.5	–	–
Silquest A-1891 silane	–	1.5	–
Viscosity @ 212°F			
Milled MB ML1+4	89	116	94
Final ML1+4	59	67	77
Scorch (t5) @ 250°F (min)	2.3	2.43	6.1
Rheometer (ODR) Properties (302°F/30 min/1°arc)			
t _{s2} (min)	1.2	1.15	2.48
t90 (min)	2.76	3.56	3.85
Cure Rate Index (t90-ts2)	1.56	2.41	1.37
M _L	9.11	10.57	13.31
M _H	32.35	31.34	37.65
Physical Properties, cured 5 min @ 302°F			
Hardness (Shore A)	56	55	61
Elongation (%)	445	444	670
10% Modulus (Mpa)	58	69	84
100% Modulus (Mpa)	407	475	318
300% Modulus (Mpa)	1461	1417	795
Reinforcement Index (300%/100%)	3.59	2.98	2.50
Tensile (psi)	2515	2194	2468
Abrasion Resistance, DIN Method			
Volume Loss, mm ³	28	27	51

Note: Test data. Actual results may vary.

Ethanol Emissions Measurement

Ethanol emissions are reduced by more than 97% with New e-free 189 silane, and 6% with Silquest* A-1589 silane (disulfide silane), versus Silquest A-1891 silane (mercapto triethoxy silane). Ethanol emissions were measured during Banbury mixing (1.5 liter mixer) of a rubber compound containing 100 phr of an SBR/BR blend, 80 phr precipitated silica and 6.2 phr of silane⁽¹⁾. The compounds were mixed in one non-productive step for a total of 15 minutes with the mix held at about 160°C for 10 minutes. Exhaust gases were suctioned out from the vent line at 1.5 liters/min and adsorbed onto charcoal tubes, which were later analyzed for ethanol content. Ethanol evolved from mixing with Silquest A-1891 silane is normalized to 100 in Table 3.

Table 3: Ethanol Emissions Measurements – 1.5 Liter Banbury Mixer

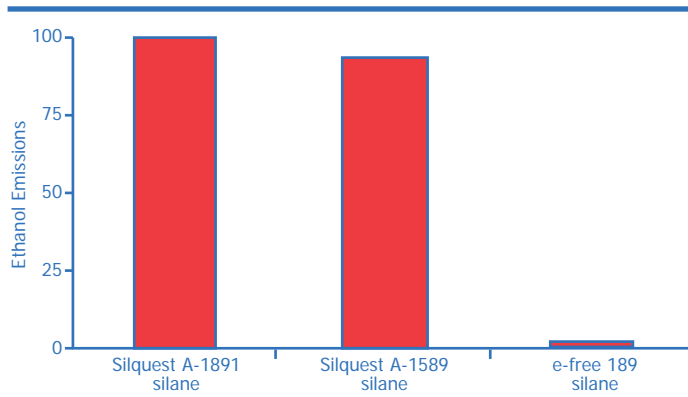

(1) Silquest A-1589 silane (Disulfide silane), Silquest A-1891 silane (Mercapto triethoxy silane), and e-free 189 silane

Note: Test data. Actual results may vary.

Momentive Performance Materials' New e-free* 189 Silane

Patent Status

e-free silane is the subject of multiple pending U.S. patent applications.

Nothing contained herein shall be construed to imply the nonexistence of any relevant patents or to constitute the permission, inducement or recommendation to practice any invention covered by any patent, without authority from the owner of the patent.

Product Safety, Handling and Storage

Customers considering the use of this product should review the latest Material Safety Data Sheet and label for product safety information, handling instructions, personal protective equipment if necessary, and any special storage conditions required. Material Safety Data Sheets are available at www.momentive.com or, upon request, from any Momentive Performance Materials representative. Use of other materials in conjunction with Momentive Performance Materials products (for example, primers) may require additional precautions. Please review and follow the safety information provided by the manufacturer of such other materials.

Limitations

Customers must evaluate Momentive Performance Materials products and make their own determination as to fitness of use in their particular applications.

Momentive Performance Materials' New e-free* 189 Silane

Emergency Service

Momentive Performance Materials maintains an around-the-clock emergency service for its products. The American Chemistry Council (CHEMTREC), Transport Canada (CANUTEC), and the Chemical Emergency Agency Service also maintain an around-the-clock emergency service for all chemical products:

Location	Momentive Performance Materials Products	All Chemical Products
Mainland U.S., Puerto Rico	518.233.2500	CHEMTREC: 800.424.9300
Alaska, Hawaii	518.233.2500	CHEMTREC: 800.424.9300
Canada	518.233.2500	CANUTEC: 613.996.6666 (collect) or CHEMTREC: 800.424.9300
Europe, Middle East, Africa	+32.(0)14.58.45.45 (Belgium)	CHEMTREC: +1-703.527.3887 (collect)
Latin America, Asia/Pacific, all other locations worldwide	+518.233.2500	CHEMTREC: +1-703.527.3887 (collect)
At sea	Radio U.S. Coast Guard, which can directly contact Momentive Performance Materials at 518.233.2500 or CHEMTREC at 800.424.9300.	

DO NOT WAIT. Phone if in doubt. You will be referred to a specialist for advice.



MOMENTIVE

performance materials

Principal Locations

Regional Information	Phone	Fax
North America		
World Headquarters 187 Danbury Road Wilton, CT 06897, USA	800.295.2392	607.754.7517
Latin America		
Rodovia Eng. Constâncio Cintra, Km 78,5 Itatiba, SP – 13255-700 Brazil	+ 55.11.4534.9650	+ 55.11.4534.9660
Europe, Middle East, Africa and India		
Leverkusen Germany	00.800.4321.1000 + 31.164.293.276	+ 31.164.241750
Pacific		
Akasaka Park Building 5-2-20 Akasaka Minato-ku, Tokyo 107-6112 Japan	+ 81.3.5544.3100	+ 81.3.5544.3101
Customer Service Centers		
North America		
Charleston, WV 25314, USA E-mail: cs-na.silicones@momentive.com	Specialty Fluids 800.523.5862	304.746.1654
	UA, Silanes, Resins, and Specialties 800.334.4674	304.746.1623
	RTV Products-Elastomers 800.332.3390	304.746.1623
	Sealants and Adhesives and Construction 877.943.7325	304.746.1654
Latin America		
Argentina and Chile	+ 54.11.4862.9544	+ 54.11.4862.9544
Brazil	+ 55.11.4534.9650	+ 55.11.4534.9660
Mexico and Central America	+ 52.55.5899.5135	+ 52.55.5899.5138
Venezuela, Ecuador, Peru, Colombia, and Caribbean	+ 58.212.285.2149	+ 58.212.285.2149
E-mail: cs-la.silicones@momentive.com		
Europe, Middle East, Africa and India		
E-mail: cs-eur.silicones@momentive.com	00.800.4321.1000 + 31.164.293.276	+ 31.164.241750
Pacific		
E-mail: cs-ap.silicones@momentive.com		
Japan	+ 81.276.20.6182	
China	+ 86.21.5050.4666 (ext. 1523)	
Korea	+ 82.2.6201.4600	
Singapore	+ 65.6220.7022	
Worldwide Hotline	800.295.2392	+ 607.786.8131
Worldwide Web		+ 607.786.8309
	www.momentive.com	

THE MATERIALS, PRODUCTS AND SERVICES OF MOMENTIVE PERFORMANCE MATERIALS INC., MOMENTIVE PERFORMANCE MATERIALS USA INC., MOMENTIVE PERFORMANCE MATERIALS ASIA PACIFIC PTE. LTD., MOMENTIVE PERFORMANCE MATERIALS WORLDWIDE INC., MOMENTIVE PERFORMANCE MATERIALS GmbH & Co. KG, MOMENTIVE PERFORMANCE MATERIALS SUISSE Sarl, THEIR SUBSIDIARIES AND AFFILIATES DOING BUSINESS IN LOCAL JURISDICTIONS (collectively "SUPPLIERS"), ARE SOLD BY THE RESPECTIVE LEGAL ENTITY OF THE SUPPLIER SUBJECT TO SUPPLIERS' STANDARD CONDITIONS OF SALE, WHICH ARE INCLUDED IN THE APPLICABLE DISTRIBUTOR OR OTHER SALES AGREEMENT, PRINTED ON THE BACK OF ORDER ACKNOWLEDGMENTS AND INVOICES, AND AVAILABLE UPON REQUEST. ALTHOUGH ANY INFORMATION, RECOMMENDATIONS, OR ADVICE CONTAINED HEREIN IS GIVEN IN GOOD FAITH, SUPPLIERS MAKE NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (i) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING SUPPLIERS' PRODUCTS, MATERIALS, SERVICES, RECOMMENDATIONS OR ADVICE. AFOREMENTIONED EXCLUSIONS OR LIMITATION OF LIABILITY ARE NOT APPLICABLE TO THE EXTENT THAT THE END-USE CONDITIONS AND/OR INCORPORATION CONDITIONS CORRESPOND TO THE RECOMMENDED CONDITIONS OF USE AND/OR OF INCORPORATION AS DESCRIBED BY SUPPLIER IN ITS PRODUCT DATA SHEET AND/OR PRODUCT SPECIFICATIONS. EXCEPT AS PROVIDED IN SUPPLIERS' STANDARD CONDITIONS OF SALE, SUPPLIERS AND THEIR REPRESENTATIVES SHALL IN NO EVENT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS OR SERVICES DESCRIBED HEREIN.

Each user bears full responsibility for making its own determination as to the suitability of Suppliers' materials, services, recommendations, or advice for its own particular use. Each user must identify and perform all tests and analyses necessary to assure that its finished parts incorporating Suppliers' products, materials, or services will be safe and suitable for use under end-use conditions. Nothing in this or any other document, nor any oral recommendation or advice, shall be deemed to alter, vary, supersede, or waive any provision of Suppliers' Standard Conditions of Sale or this Disclaimer, unless any such modification is specifically agreed to in a writing signed by Suppliers. No statement contained herein concerning a possible or suggested use of any material, product, service or design is intended, or should be construed, to grant any license under any patent or other intellectual property right of Suppliers or any of its subsidiaries or affiliates covering such use or design, or as a recommendation for the use of such material, product, service or design in the infringement of any patent or other intellectual property right.